



MF 41

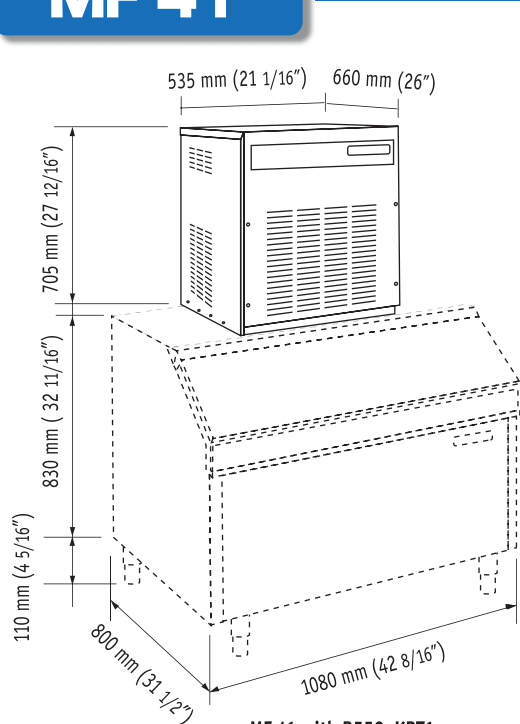

MF 41 with B550+KBT1

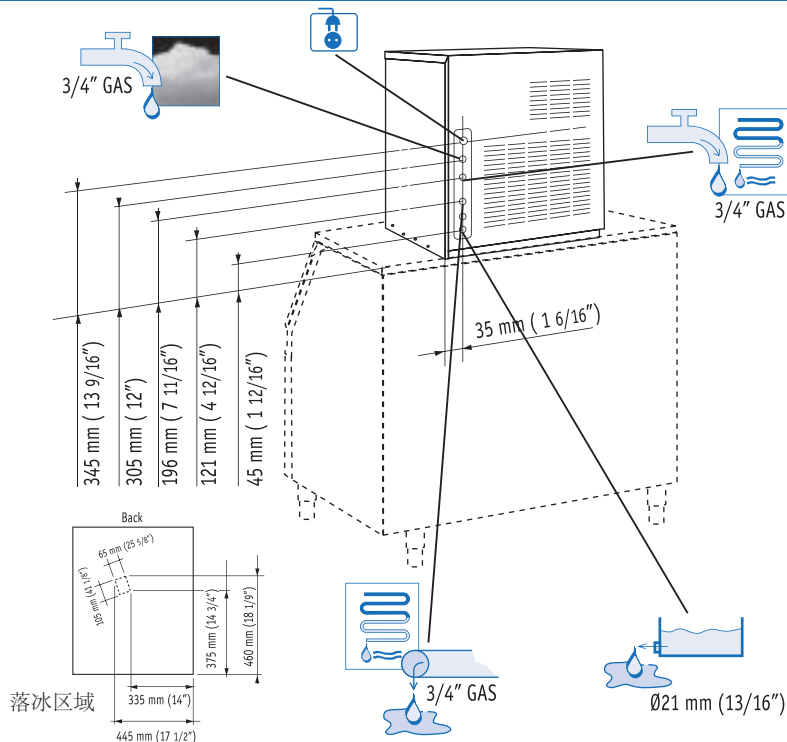

											
	+C° -C°	[Btu/h] [W]	[Ømm²]	[W]	FUSE	[kWh] 24h	[l/h] [gal/h]	32°C 90°F 21°C 70°F	[kg] [lbs]	[kg] [lbs]	[kg] [lbs]
MF 41 AS		8900 2610	3x1.5	1200	16 A	26	11 2.9		79 174	88 194	
MF 41 WS		8900 2610	3x1.5	1200	16 A	26	115 30		78 172	87 192	

MF 41 风冷式



°F	50°	60°	70°	90°	
°C	10°	15°	21°	32°	
10°	320	305	290	260	kg
50°	705	672	639	573	lbs
21°	315	300	285	255	kg
70°	694	661	628	562	lbs
32°	270	255	240	210	kg
90°	595	562	529	463	lbs
38°	250	235	220	190	kg
100	551	518	485	419	lbs



MF 41 水冷式



°F	50°	60°	70°	90°	
°C	10°	15°	21°	32°	
10°	330	315	300	270	kg
50°	728	695	661	595	lbs
21°	325	310	295	265	kg
70°	716	684	650	584	lbs
32°	320	305	290	260	kg
90°	705	672	639	573	lbs
38°	310	295	280	250	kg
100	683	650	617	551	lbs



最小值

10°C (50°F)

5°C (41°F)

-10%

1 BAR
14 psi



最大值

40°C (104°F)

35°C (95°F)

+10%

5 BAR
70 psi

Scotsman®

The one the world relies on.™

